


# RUBBER COAT™



**100% WATERPROOF  
RUBBERIZED  
WALL MEMBRANE**

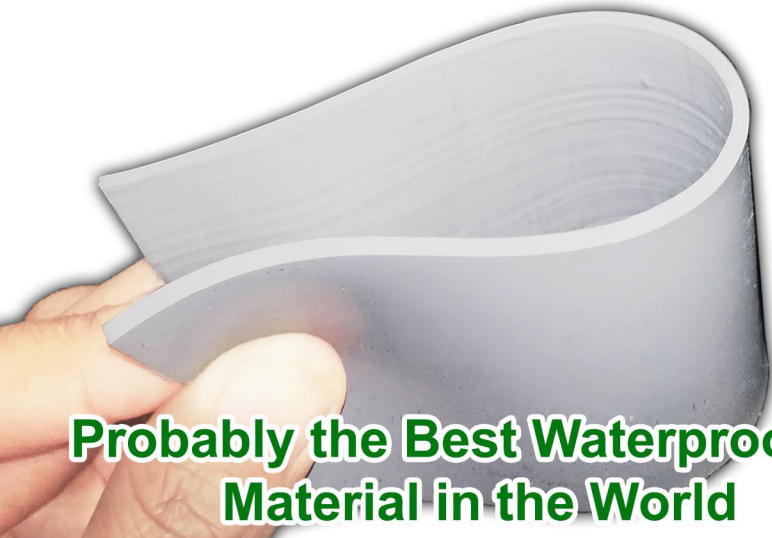

**Probably the Best Waterproofing  
Material in the World**

**In Partnership with The World's Leading Chemical Company**



**100% Waterproof**



**Superior Flexibility and Elongation**



**Tough & Durable  
Dries in 30mins or less**



**Easy to Apply  
by Brush or Roller**



# RUBBER COAT™

100% WATERPROOF

RUBBERIZED WALL MEMBRANE

## DESCRIPTION

**RUBBERCOAT WM** is a one component, self vulcanizing water based synthetic rubberized waterproofing wall mastic designed for waterproofing walls like firewall, drywall, partition wall, building wall and any exterior walls.

Developed with the world's leading chemical company - its advanced polymer technology gives **RUBBERCOAT WM** superior flexibility and elongation. Displaying outstanding waterproofing features with very low water vapor transmission properties and the ability to withstand permanent wet conditions without re-emulsification of the cured mastic.

## FEATURES AND BENEFITS


- **Water Based** - free from solvents, non toxic and non flammable
- **Outstanding Waterproofing Ability** - can be used on permanently wet areas
- **Superior Flexibility and Elongation** - accommodates normal building substrate movement
- **Fast Project Turn-Around** - dries in 30 minutes or less, saves on labor cost
- **Tough, Durable and Excellent Adhesion** - high tensile strength seamless mastic
- **Excellent Vapor Barrier** - very low water vapor transmission properties
- **Easy to Apply** - by brush, roller or spray
- **Low Odor and Environmentally Safe** - free from dangerous fumes and ROHS Certified

## SURFACE PREPARATION

- Surface must be clean, dry, and stable and free from dust, dirt, oil, grease and other contaminants that will impede on adhesion of waterproofing.
- Repair any imperfections and fill cracks, holes and nail heads with an exterior filler or repair mortar
- Treat any fungus (mold and mildew) growth areas

**Prime-R™**  
Clear Concrete  
Primer and Sealer

**RUBBER COAT™**  
100% WATERPROOF  
RUBBERIZED WALL MEMBRANE

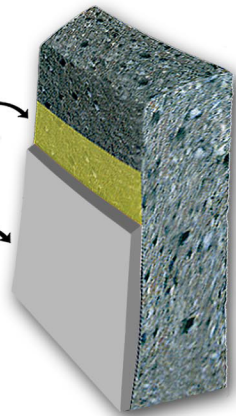

## COMPOSITION:

SBR Rubber Hybrid Polymer  
Polysiloxane Copolymer  
Polyurethane Polymer  
Functional Fillers

## APPLICATIONS

- Exterior walls
- Concrete & Masonry surfaces
- Bricks & Stucco
- Hollow Blocks
- Fire wall & Partition wall
- Drywall & Fiber Cement Boards
- Primed Wood & Metal Surfaces



- COLOR:** Light Gray
- PACKAGING:** 4 liters, 16 liters
- APPLICATION:** Brush, Roller or Spray
- COVERAGE:** **4 liters** - 16.0 sq.m @ 0.25mm. wet film thickness / coat  
**16 liters** - 64.0 sq.m. @ 0.25mm. wet film thickness / coat
- DRYING TIME:** 30 mins. @ 30°C - touch dry  
1 hour @ 30°C - recoat  
8 hours @ 30°C- dry through
- ELONGATION:** 327% (Max)
- CLEANUP:** Clean up excess with water and soap solution while wet.

 **CAMPBRIDGE**  
PAINTS  
The Waterproofing Company

29-D GENERAL TIRONA STREET, CALOOCAN CITY, PHILIPPINES  
PHONE NO. (0917) 891 0539  
www.campbridge.net • email: campbridgepaint@gmail.com

DISCLAIMER: The product information and application details given by the company and its agents has been provided in good faith and meant to serve only as a general guideline during usage. Users are advised to carry out tests and take trials to ensure on the suitability of products meeting their requirement prior to full scale usage of our products. Since the correct identification of the problems, quality of other materials used and the on-site workmanship are factors beyond our control, there are no expressed or implied guarantee/warranty as to the results obtained. The company does not assume any liability or consequential damage for unsatisfactory results, arising from the use of our products.